

YC-8X COMPONENT Y&Cb&Cr DISTRIBUTOR





INTRODUCTION


Oarsman's YC-8X is an innovative Component Video (YPbPr) Distribution Amplifier. It is useful for distribution signals from high quality Video devices, Video game consoles, Video CDs, DVDs, Satellite Receivers, STB set-top boxes, also useful for distributing audio source like CD players and tuners for multi-zone sound System.

It support 2 Video input and provides 8 output to HDTVs, LCD TVs, PDP TVs. And this 8 outlet distribution amp supporting Cable runs up to 200ft. The signal is as clean as the input signal.

Oarsman's YC-8X can be together for an unlimited number of television connections. User can expand the quantity depend on what they need in actual condition. Also user can take it as a common quality A/V to use it.

FEATURES

- ★10Hz-150MHz Super Wide Band
- ★Serving 2 purpose for video and audio amplification
- ★It is available to take it as a common quality A/V to use.
- ★Switchable for 2 Set Input
- ★8-set outlet can be connected for among the YC-8Xs.
- **★**Golden plated RCA connectors
- ★Transmitting distance runs up to 200ft.

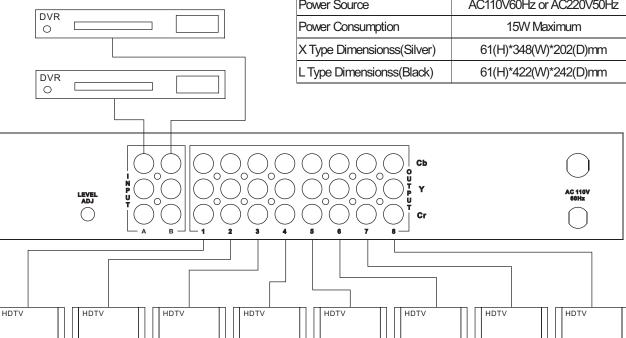

SPECIFICATIONS

Bandwidth	10Hz~150MHz
Gain	6dB
Input Level	1Vp-p
Output Level	1Vp-p
Input Port	2 Component YPrPb(YCrCb) IN
Output Port	8 Component YPrPb(YCrCb) OUT
Input Connector/ Impedance	Gold RCA JACK / 75ohm
Output Connector/Impedance	Gold RCA JACK / 75ohm
Power Source	AC110V60Hz or AC220V50Hz
Power Consumption	15W Maximum
X Type Dimensionss(Silver)	61(H)*348(W)*202(D)mm
L Type Dimensionss(Black)	61(H)*422(W)*242(D)mm